


12F31


単位重量 : 0.491kg/m

1:1.5



L寸	熱抵抗(°C/W)
L50	12.69
L100	7.33
L150	5.28


— L=50
— L=100
— L=150

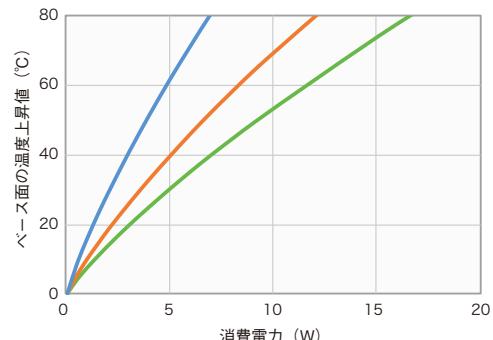

12F46


単位重量 : 0.715kg/m

1:1.5

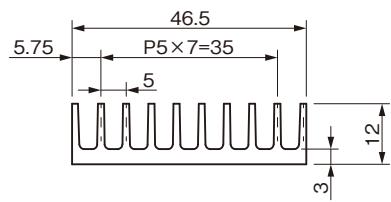

L寸	熱抵抗(°C/W)
L50	8.40
L100	4.99
L150	3.52


— L=50
— L=100
— L=150

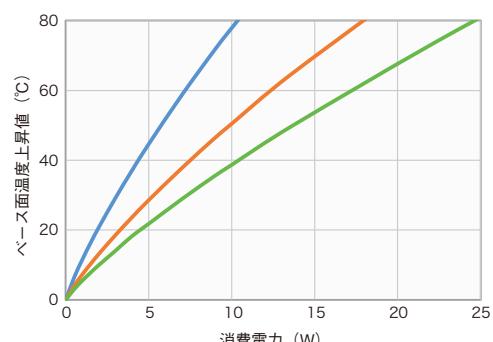

12F51


単位重量 : 0.789kg/m

1:1.5

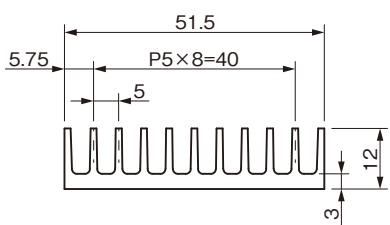

L寸	熱抵抗(°C/W)
L50	7.58
L100	4.43
L150	3.18


— L=50
— L=100
— L=150

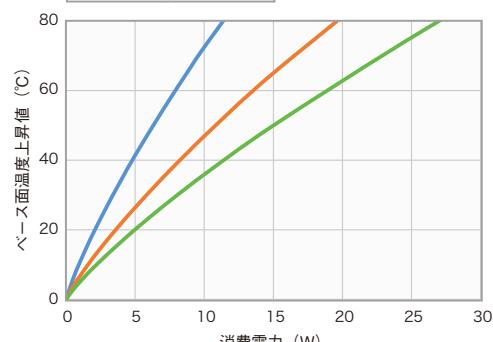

12F66


単位重量 : 1.012kg/m


1:1.5

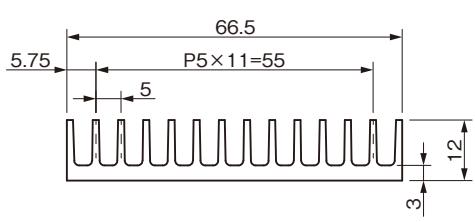


L寸	熱抵抗(°C/W)
L50	6.02
L100	3.52
L150	2.54

— L=50
— L=100
— L=150

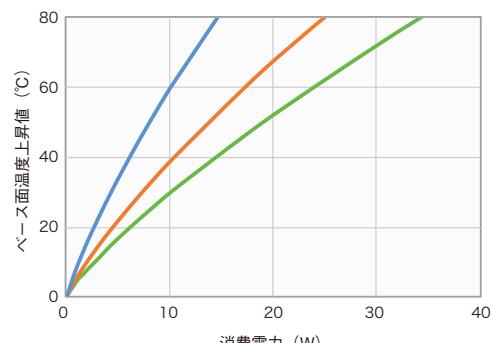

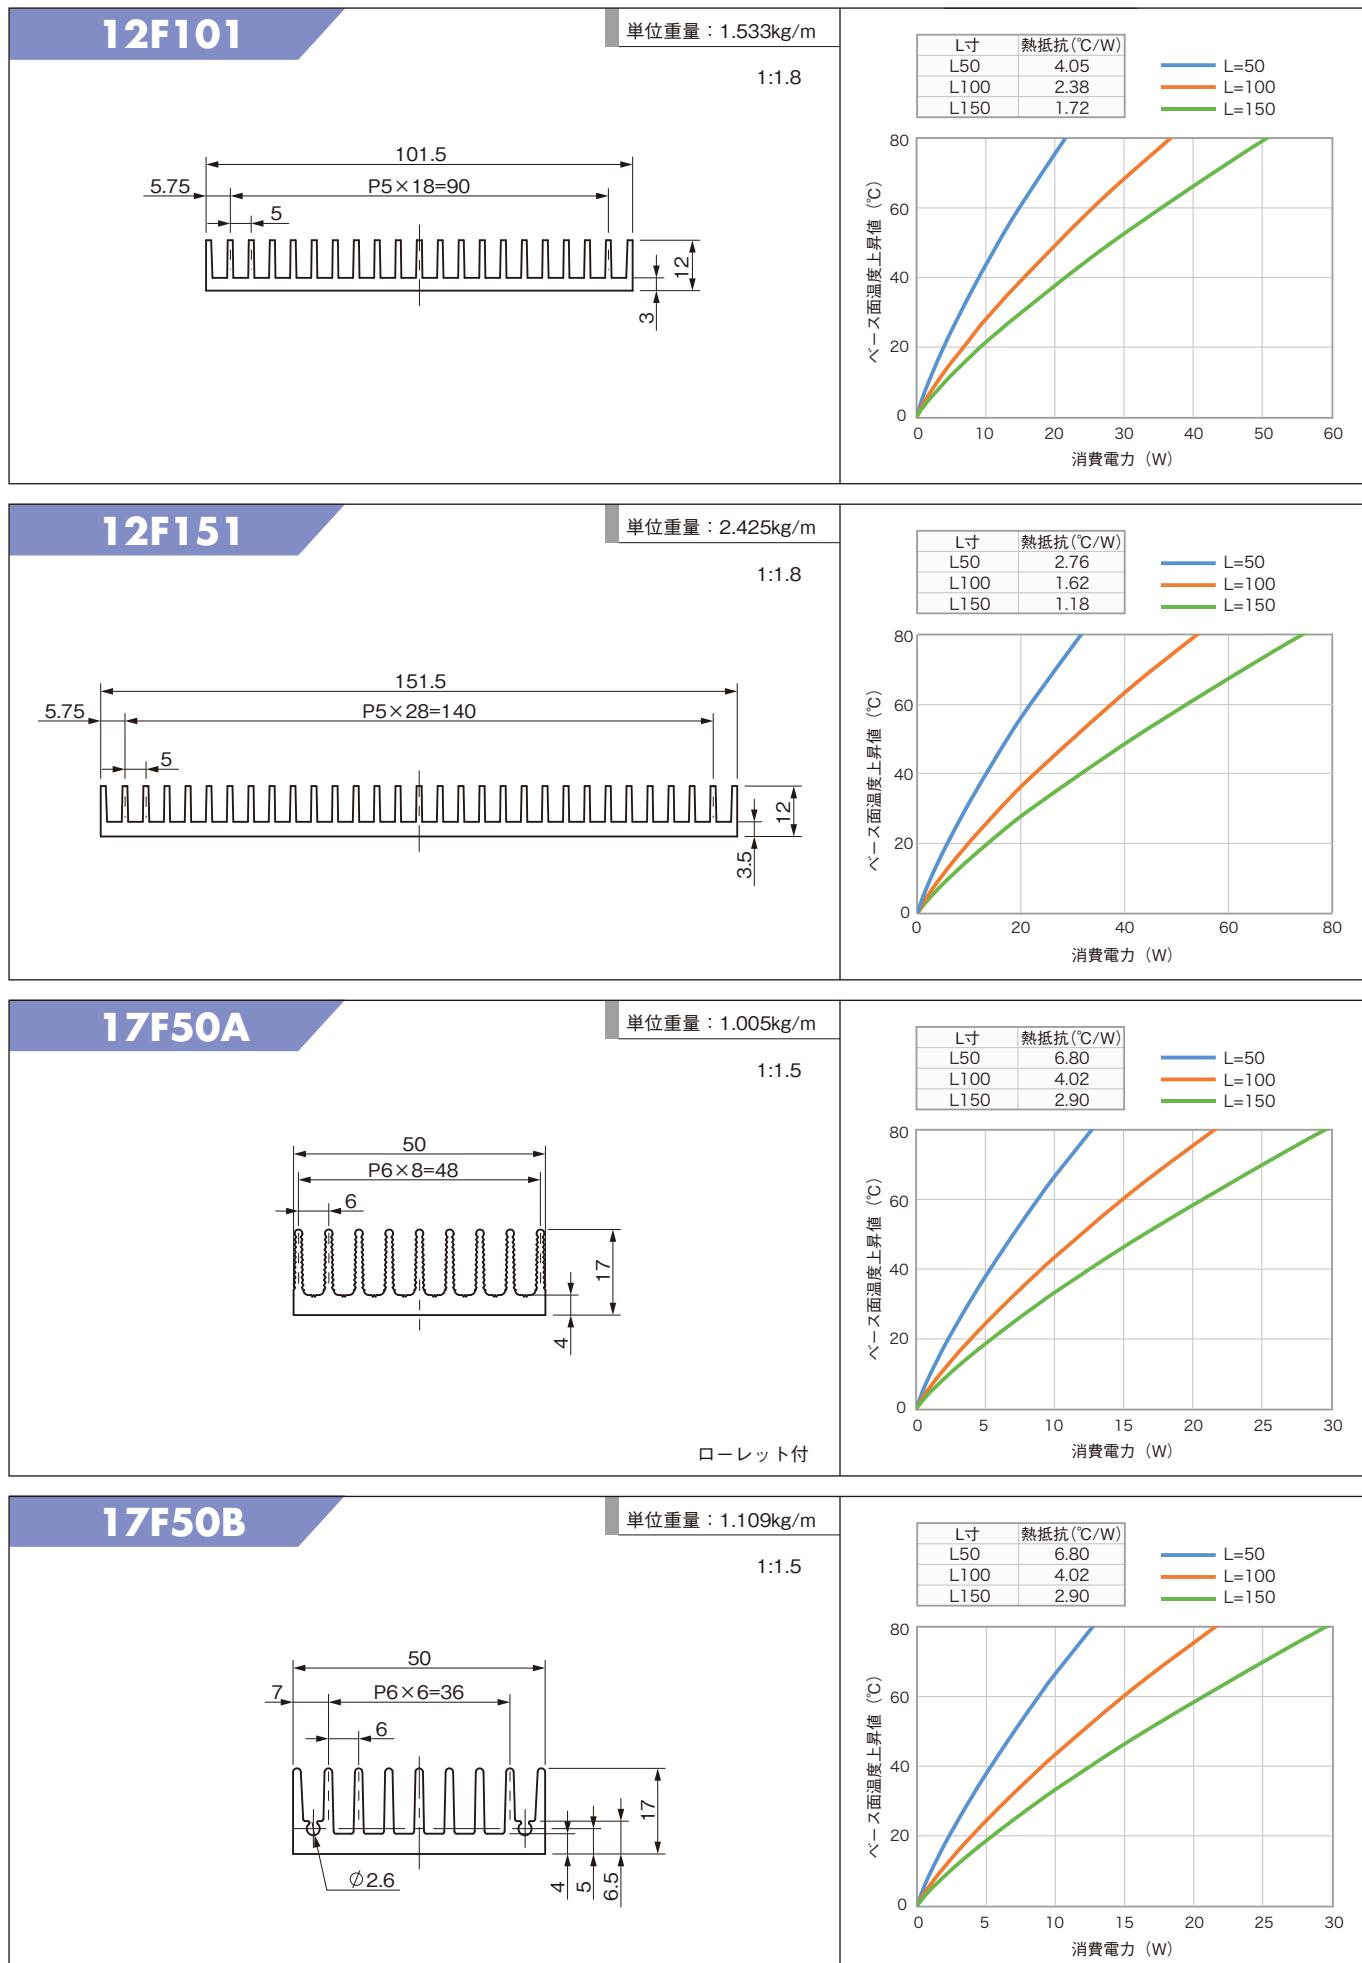


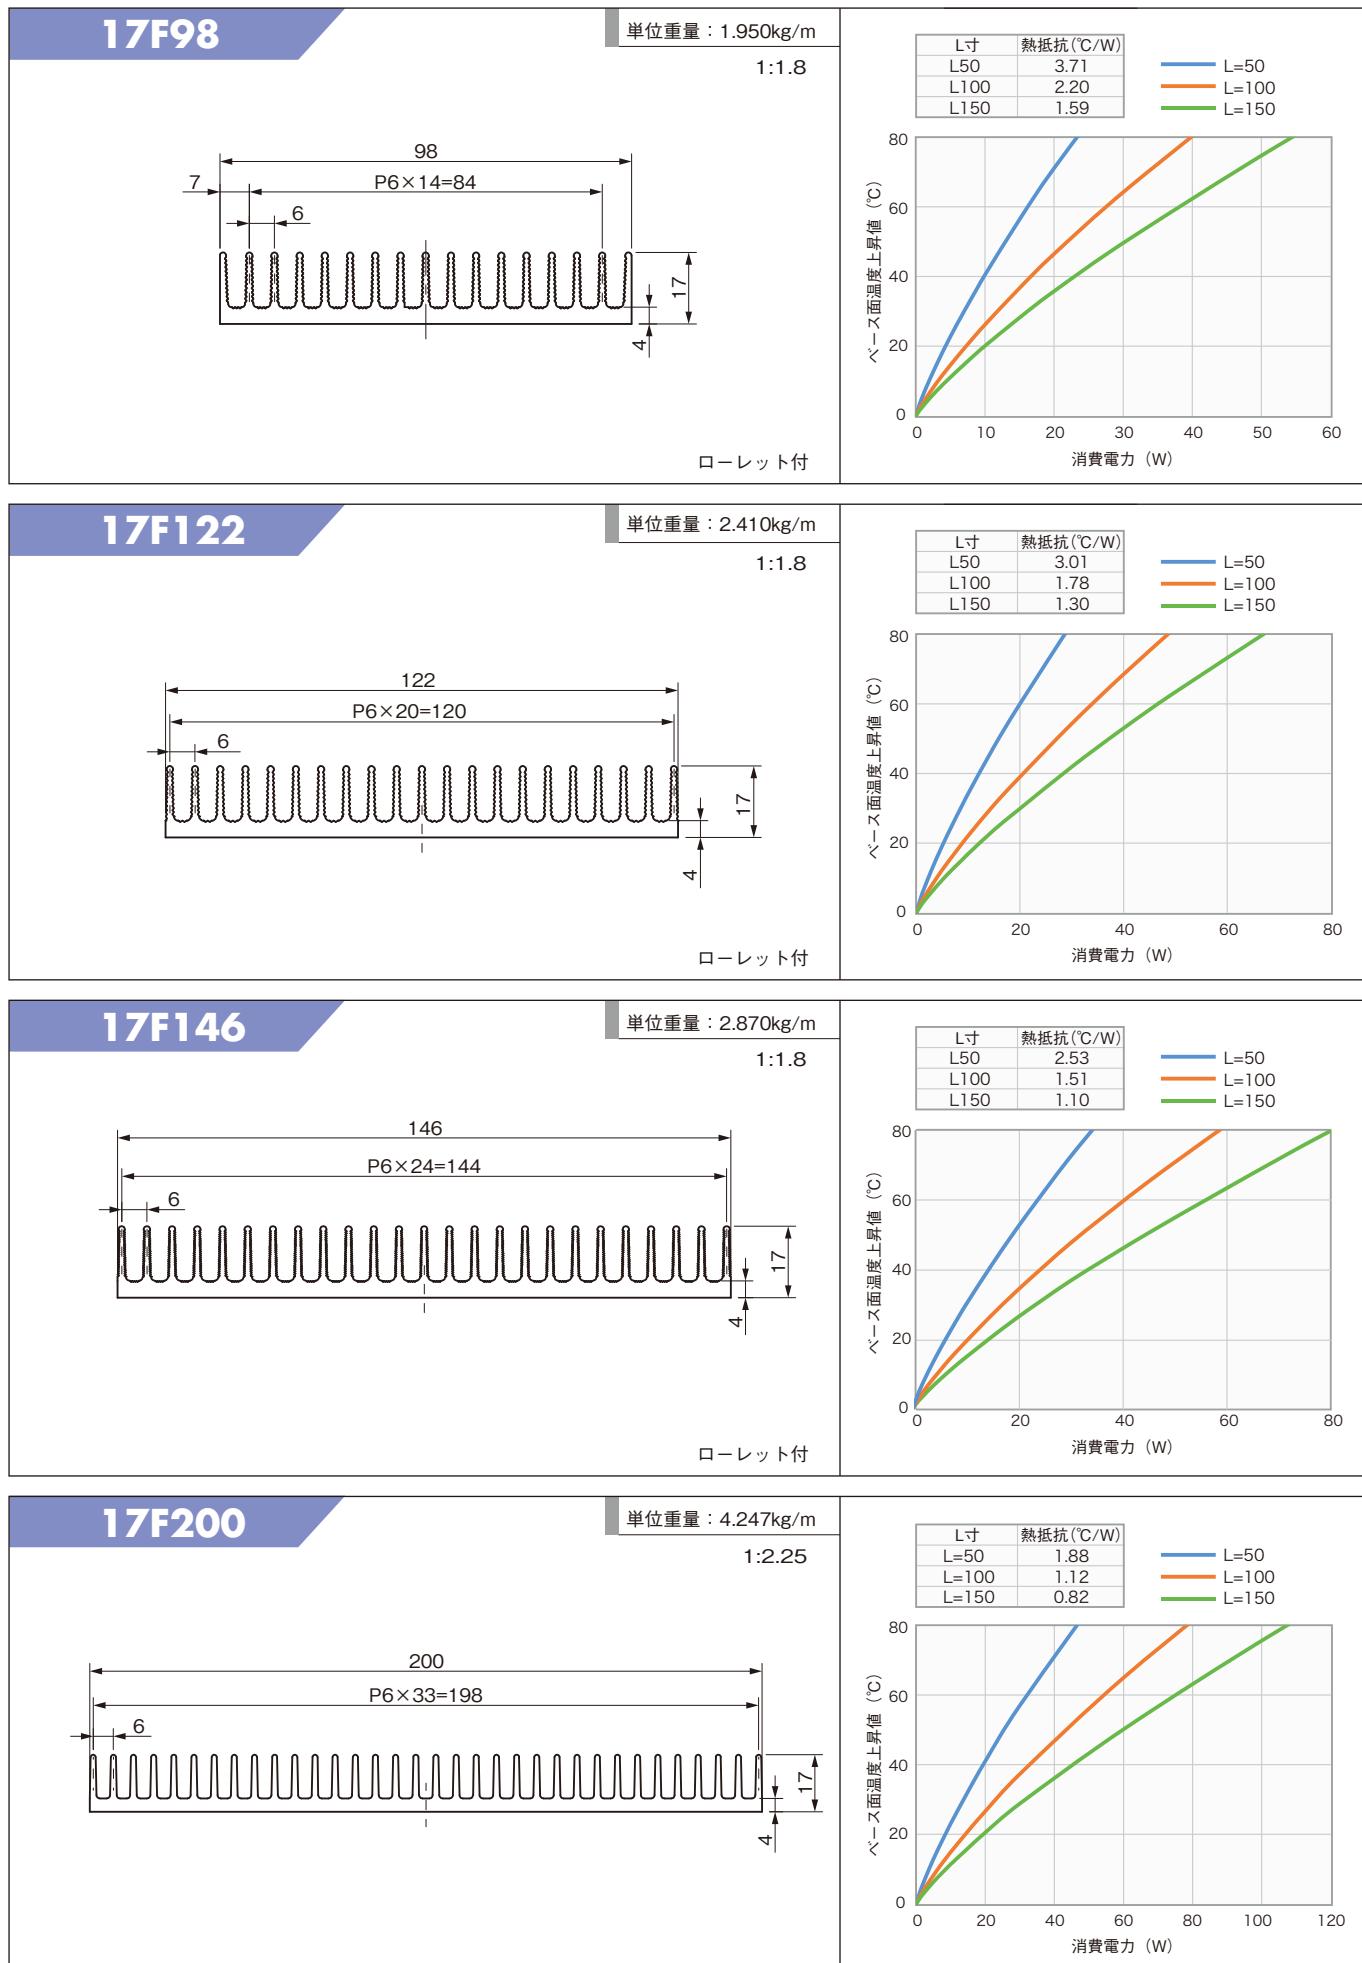

20F183


単位重量 : 4.957kg/m

1:2

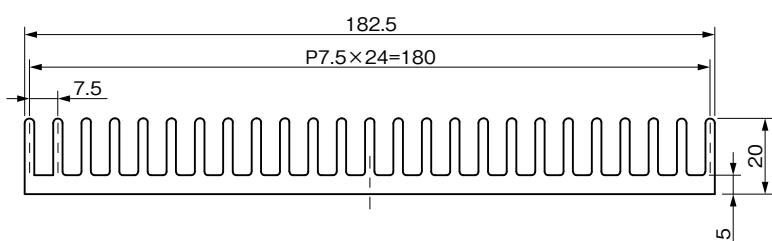

L寸	熱抵抗(°C/W)
L50	1.69
L100	1.23
L150	0.90


— L=50
— L=100
— L=150

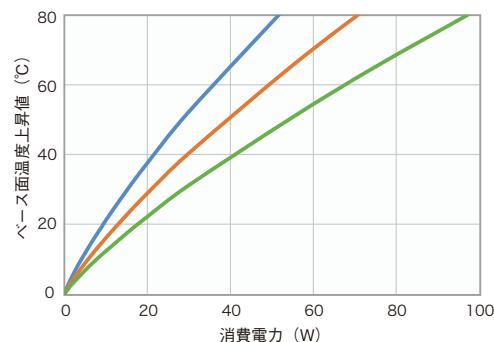

21F50


単位重量 : 1.513kg/m

1 : 1.8



L寸	熱抵抗(°C/W)
L50	5.55
L100	4.04
L150	2.96


— L=50
— L=100
— L=150

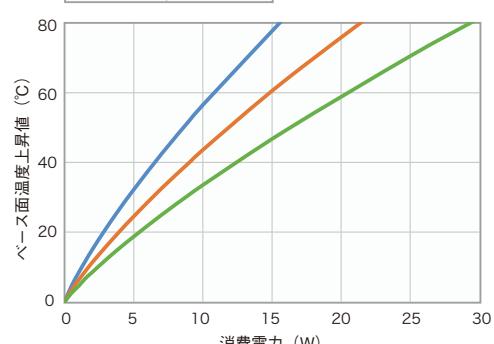

21F74


単位重量 : 2.180kg/m

1 : 1.8

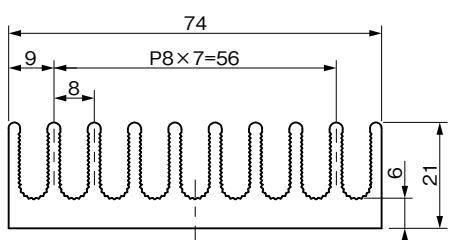

L寸	熱抵抗(°C/W)
L50	4.01
L100	2.88
L150	2.09


— L=50
— L=100
— L=150

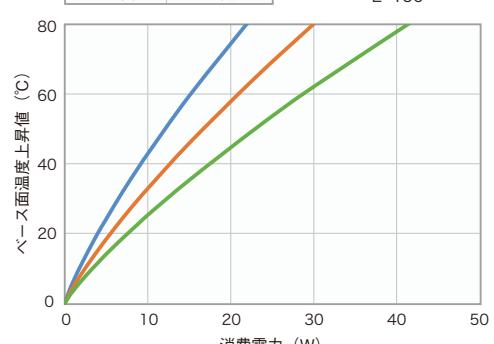

21F98


単位重量 : 2.895kg/m


1 : 1.8

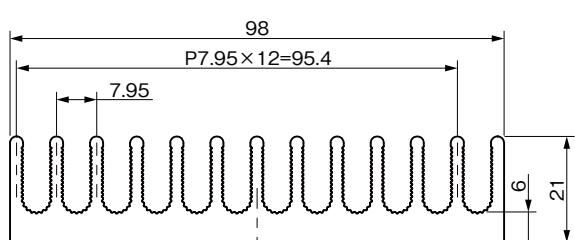


L寸	熱抵抗(°C/W)
L50	3.06
L100	2.24
L150	1.63

— L=50
— L=100
— L=150

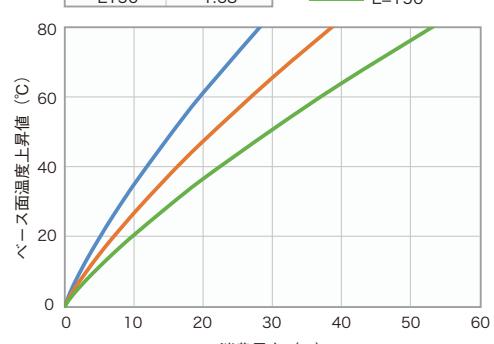

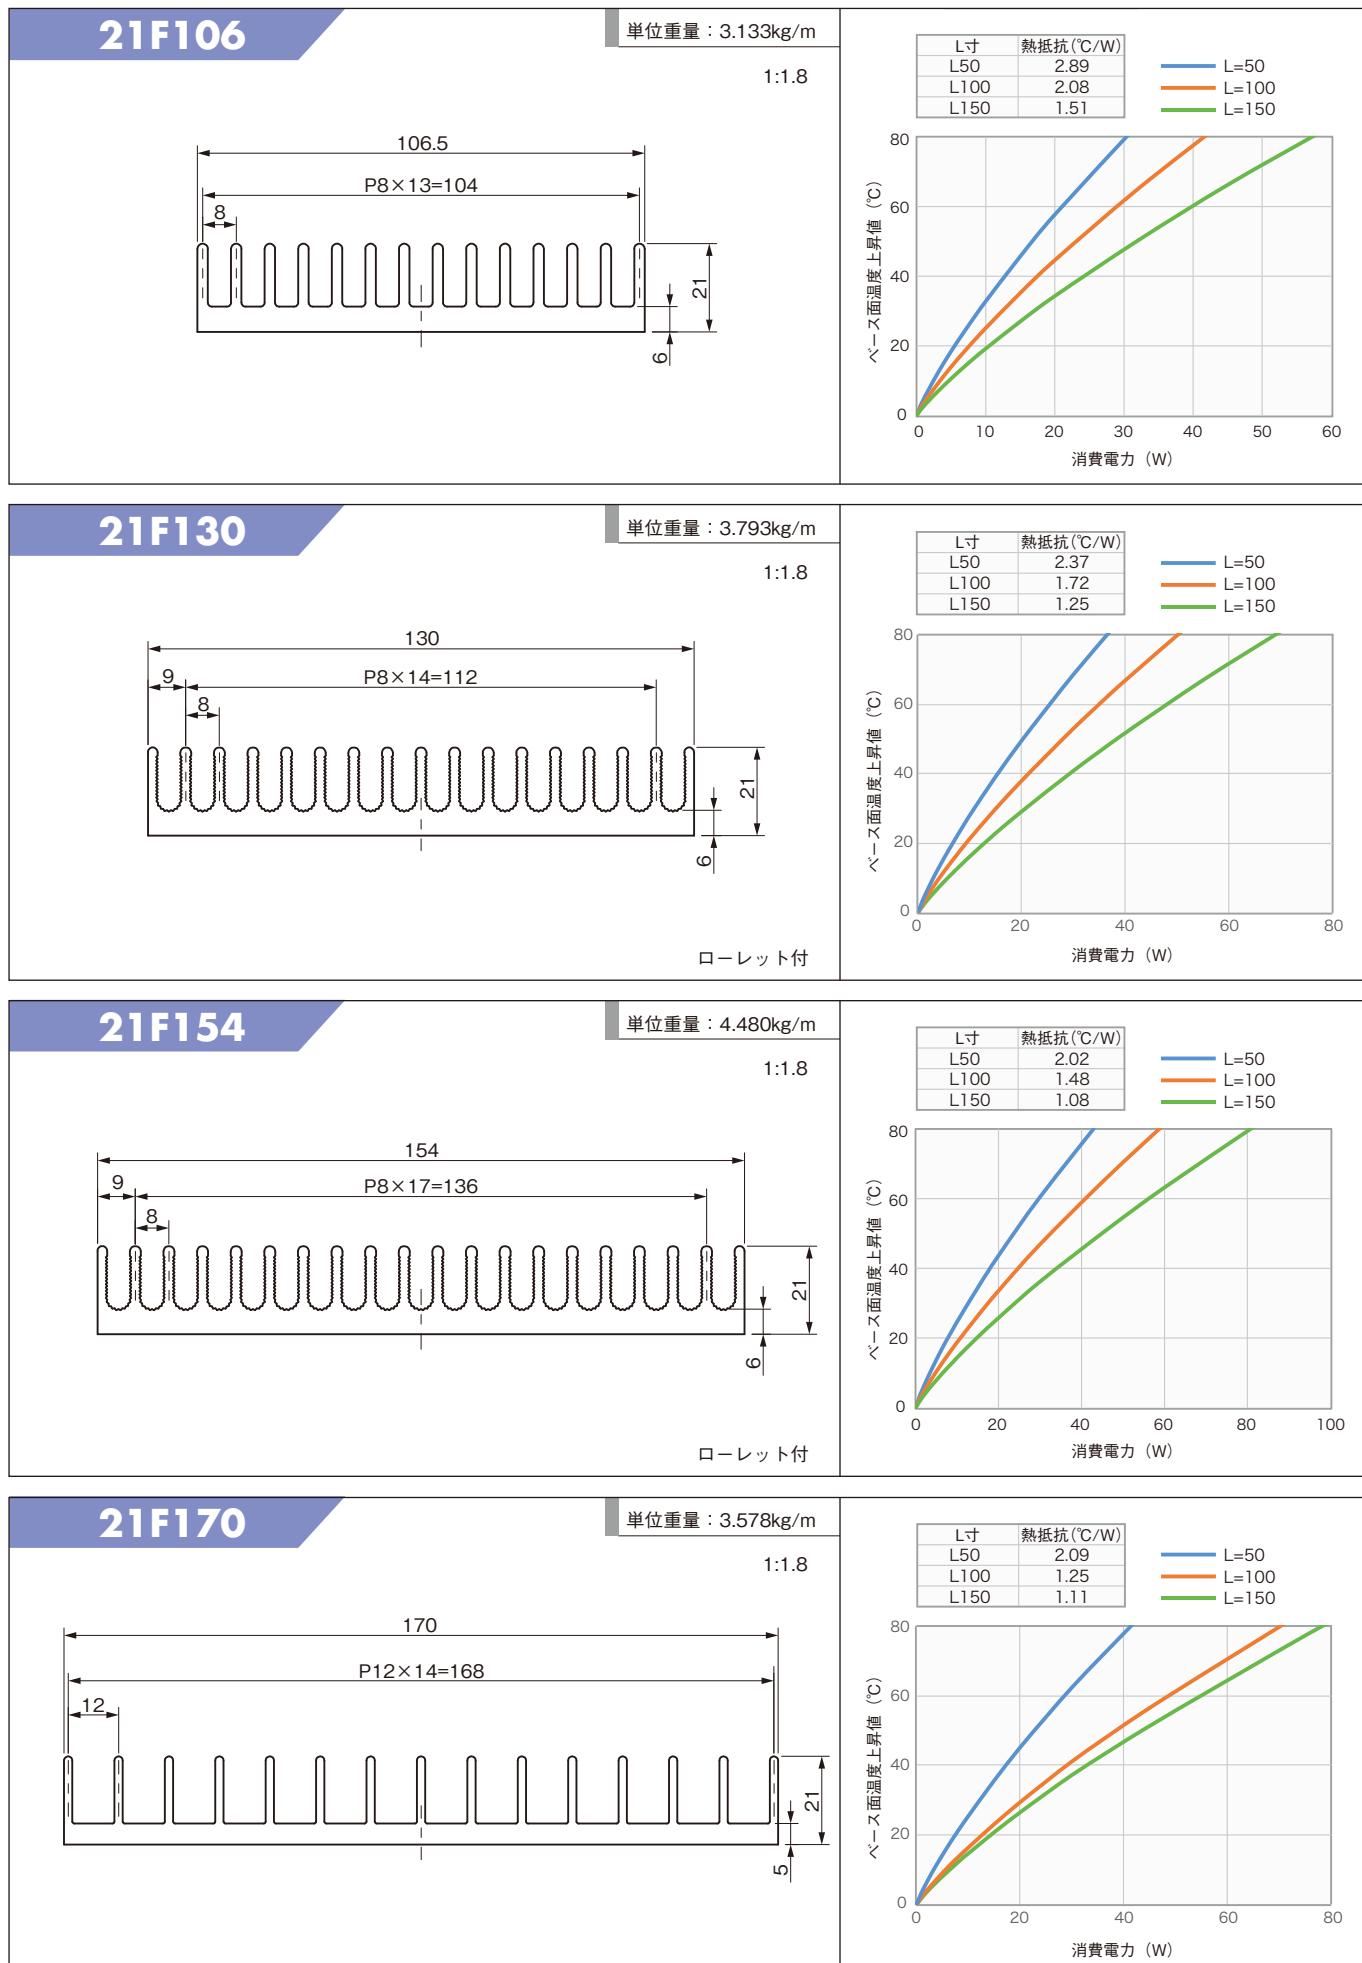


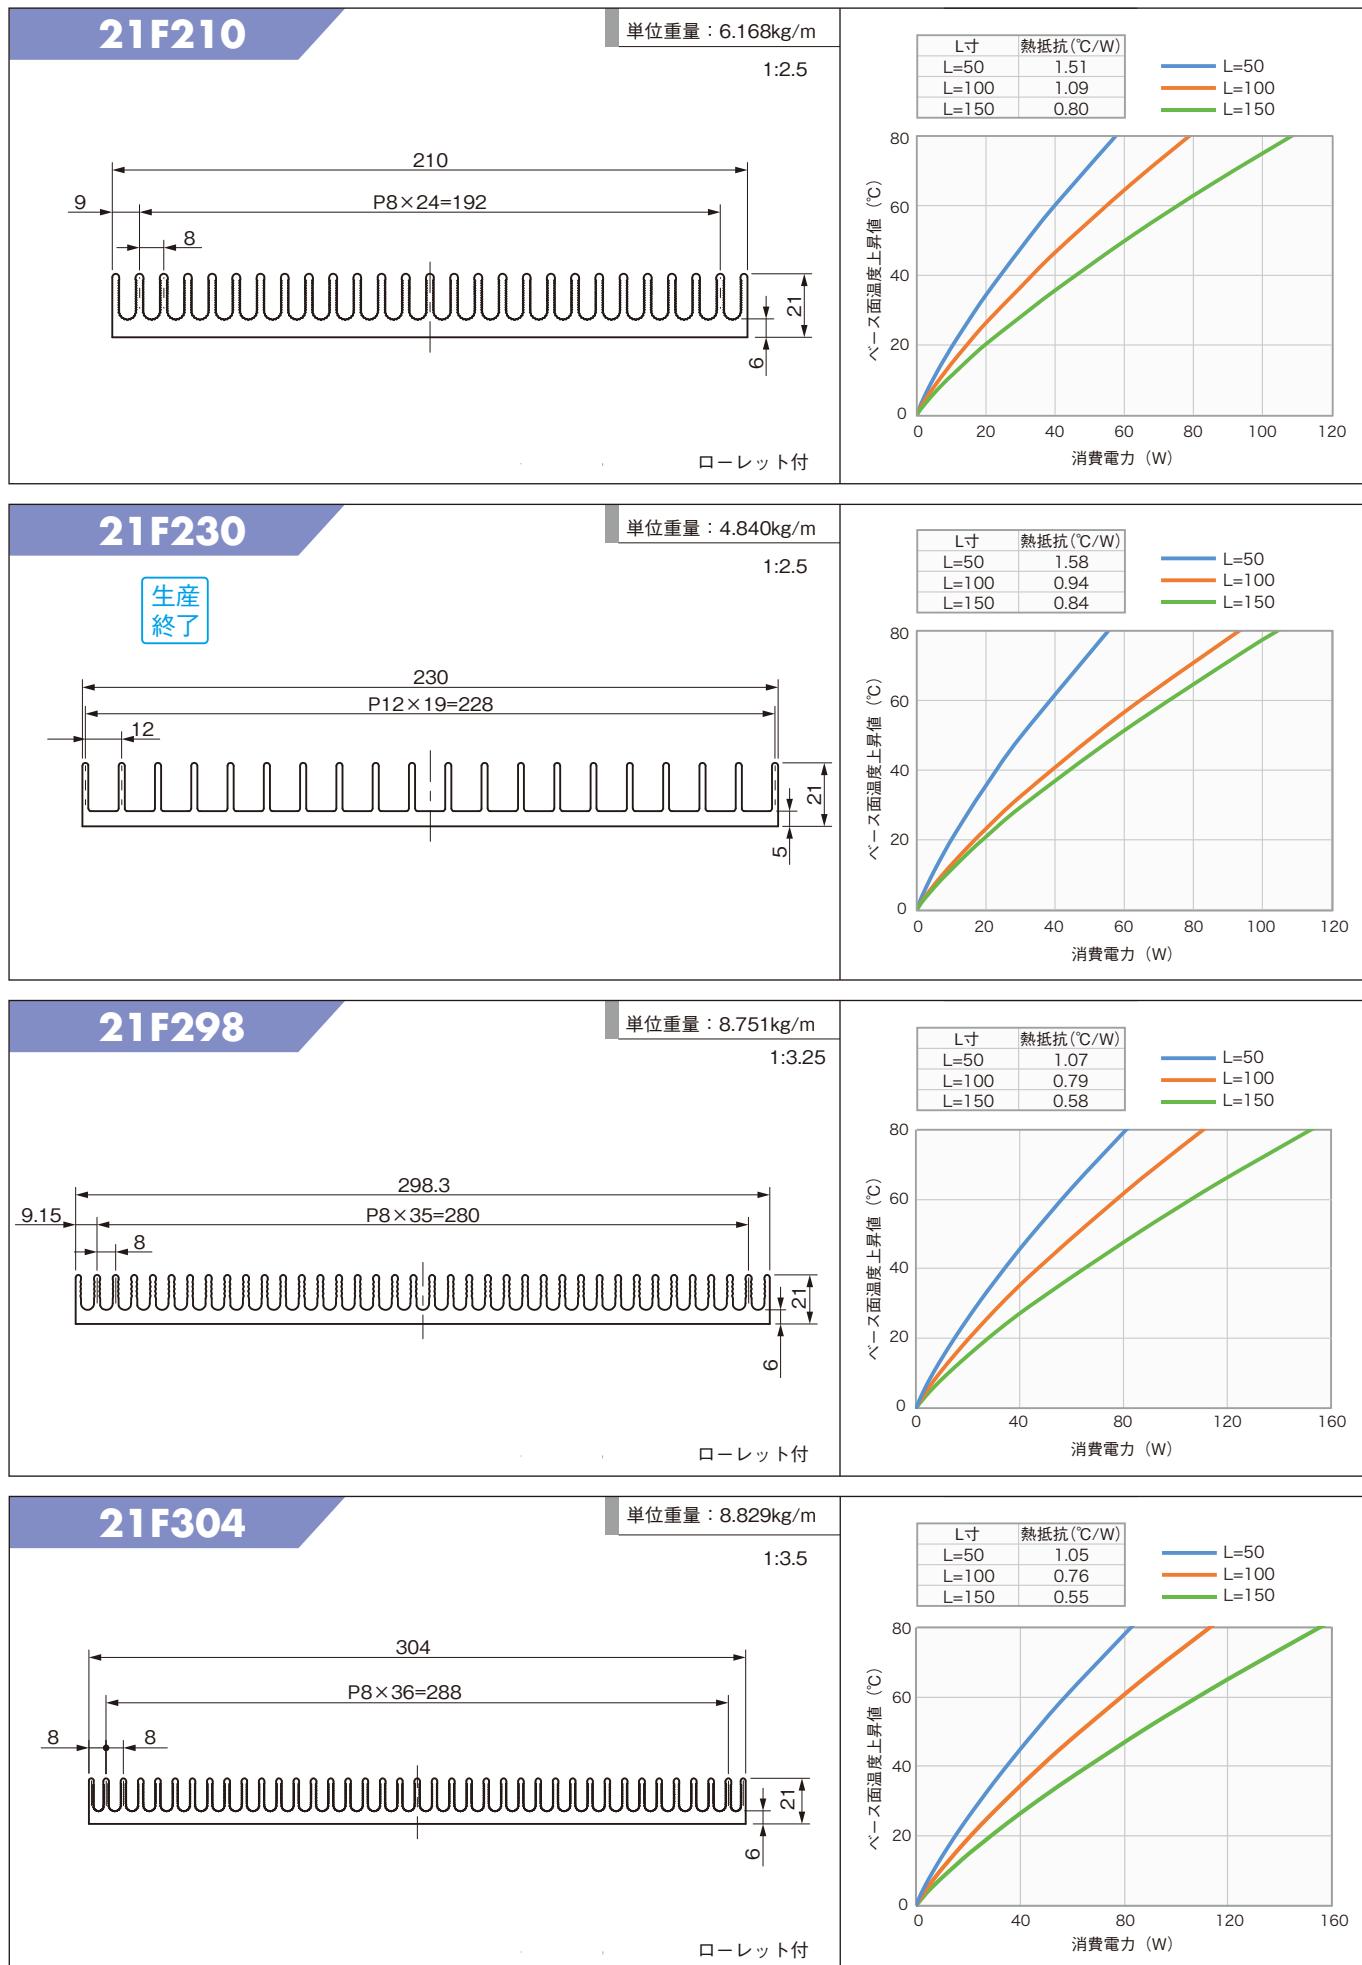

24F84


単位重量 : 2.173kg/m

1:1.8

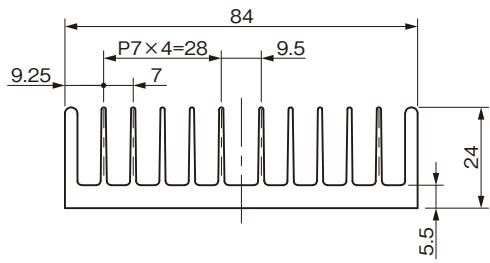

L寸	熱抵抗(°C/W)
L50	3.12
L100	2.27
L150	1.66


— L=50
— L=100
— L=150

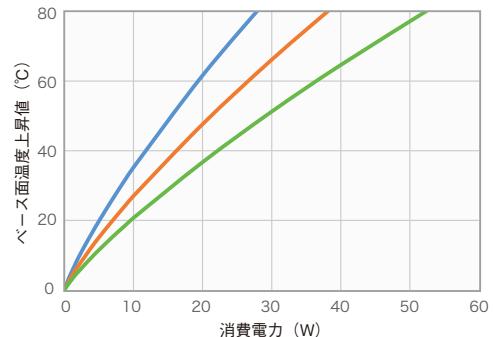

25F150


単位重量 : 3.209kg/m

1:2

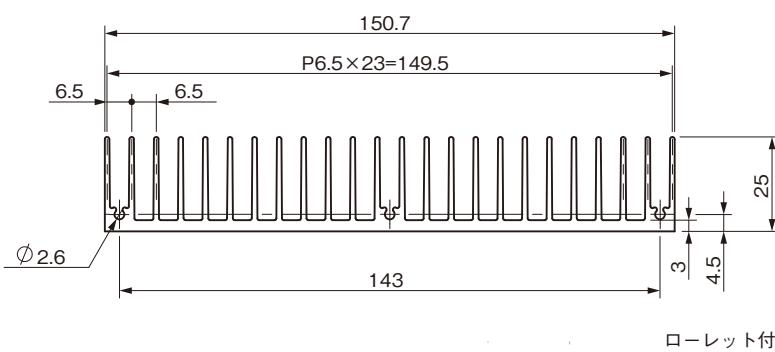

L寸	熱抵抗(°C/W)
L50	1.52
L100	1.12
L150	0.83


— L=50
— L=100
— L=150

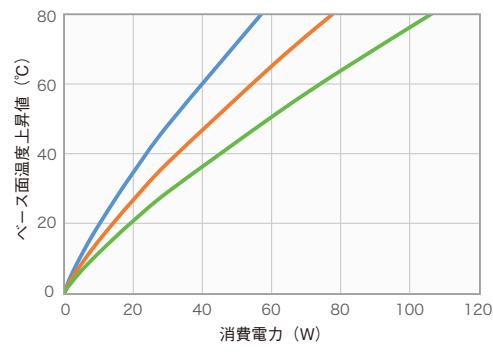

25F294


単位重量 : 6.539kg/m

1:3.5

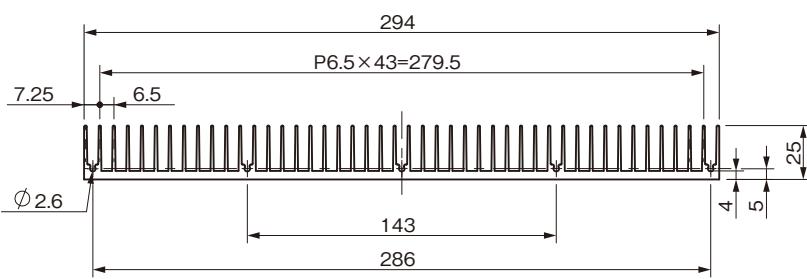

L寸	熱抵抗(°C/W)
L50	0.83
L100	0.61
L150	0.45


— L=50
— L=100
— L=150

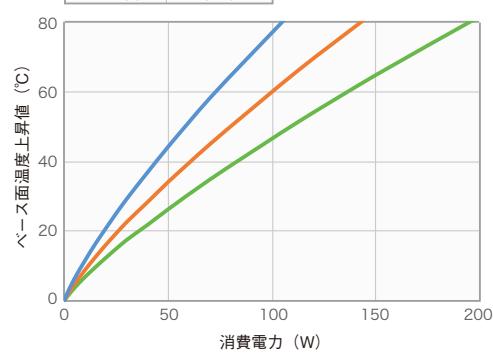

30F34


単位重量 : 0.977kg/m

1:1.8



L寸	熱抵抗(°C/W)
L50	5.68
L100	4.13
L150	3.01


— L=50
— L=100
— L=150

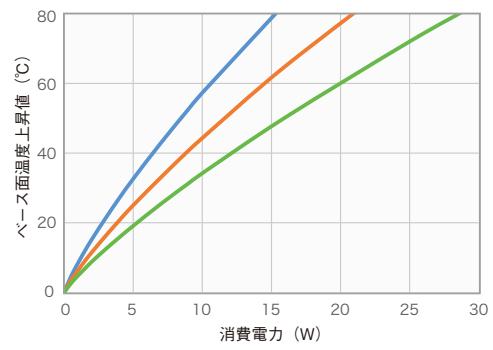

30F58


単位重量 : 1.590kg/m

1:1.8



L寸	熱抵抗(°C/W)
L50	3.65
L100	2.68
L150	1.96


— L=50
— L=100
— L=150

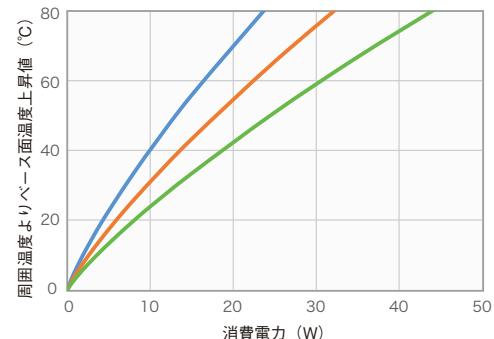

30F74


単位重量 : 2.002kg/m

1:1.8

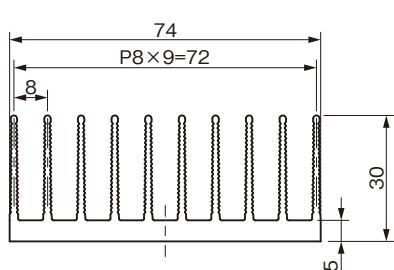

L寸	熱抵抗(°C/W)
L50	2.97
L100	2.17
L150	1.59


— L=50
— L=100
— L=150

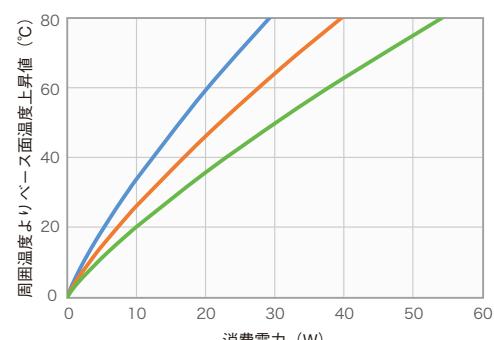

30F98


単位重量 : 2.623kg/m

1:1.8

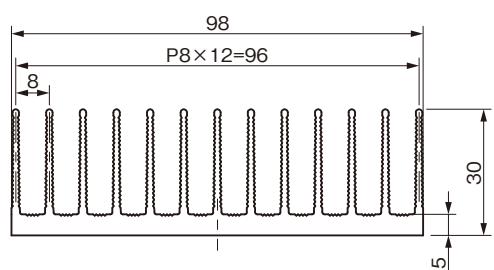

L寸	熱抵抗(°C/W)
L50	2.30
L100	1.70
L150	1.25


— L=50
— L=100
— L=150

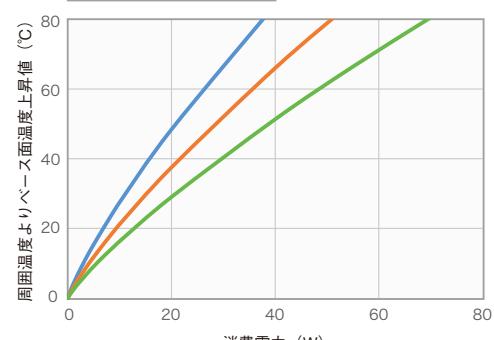

30F109


単位重量 : 2.878kg/m

1:2.25

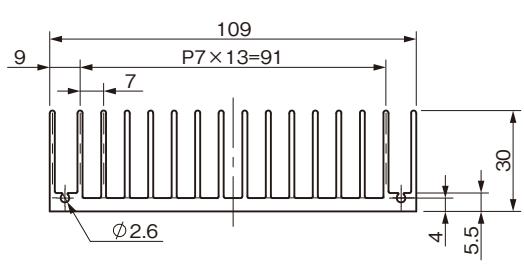

L寸	熱抵抗(°C/W)
L50	1.93
L100	1.42
L150	1.05


— L=50
— L=100
— L=150

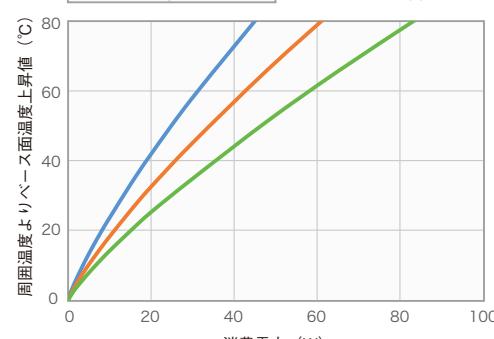

30F138


単位重量 : 3.634kg/m

1:2.25

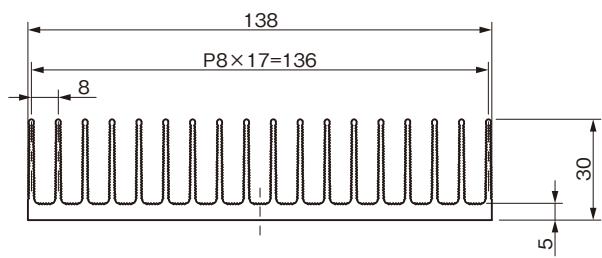

L寸	熱抵抗(°C/W)
L50	1.68
L100	1.24
L150	0.92


— L=50
— L=100
— L=150

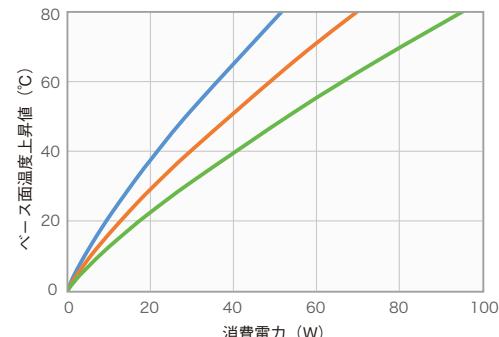

30F143


単位重量 : 4.160kg/m

1:2.25

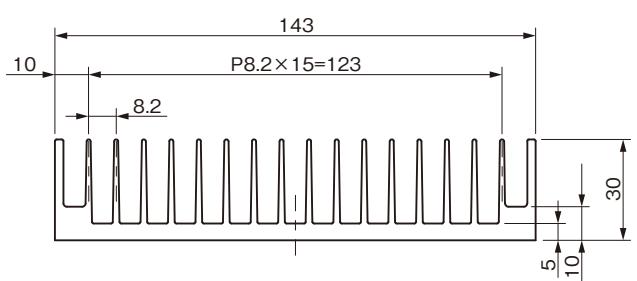

L寸	熱抵抗(°C/W)
L50	1.66
L100	1.23
L150	0.90


— L=50
— L=100
— L=150

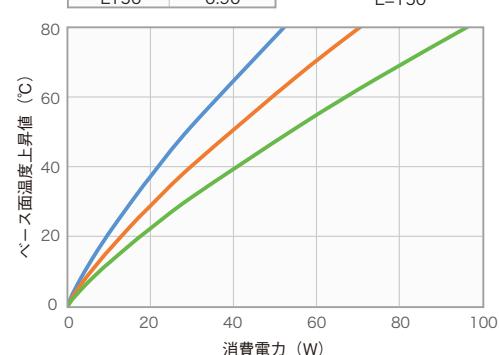

30F202


単位重量 : 5.332kg/m

1:2.25

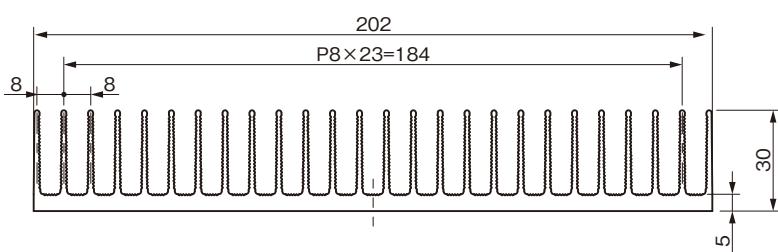

L寸	熱抵抗(°C/W)
L50	1.17
L100	0.87
L150	0.64


— L=50
— L=100
— L=150

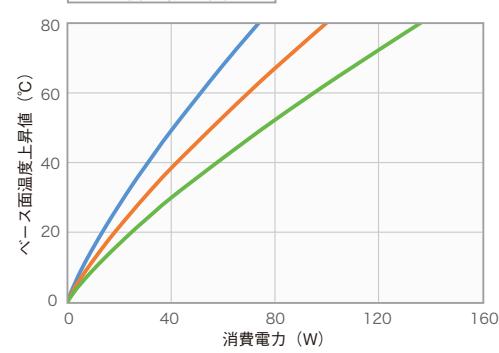

30F250


単位重量 : 6.610kg/m


1:3.25

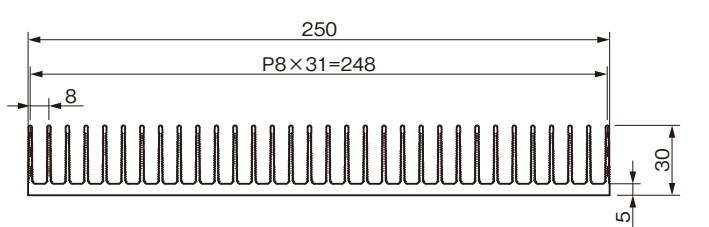

L寸	熱抵抗(°C/W)
L50	0.96
L100	0.71
L150	0.52

— L=50
— L=100
— L=150

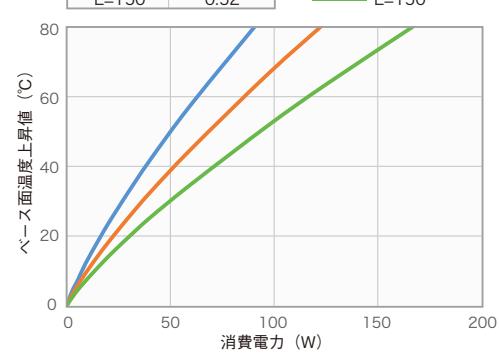


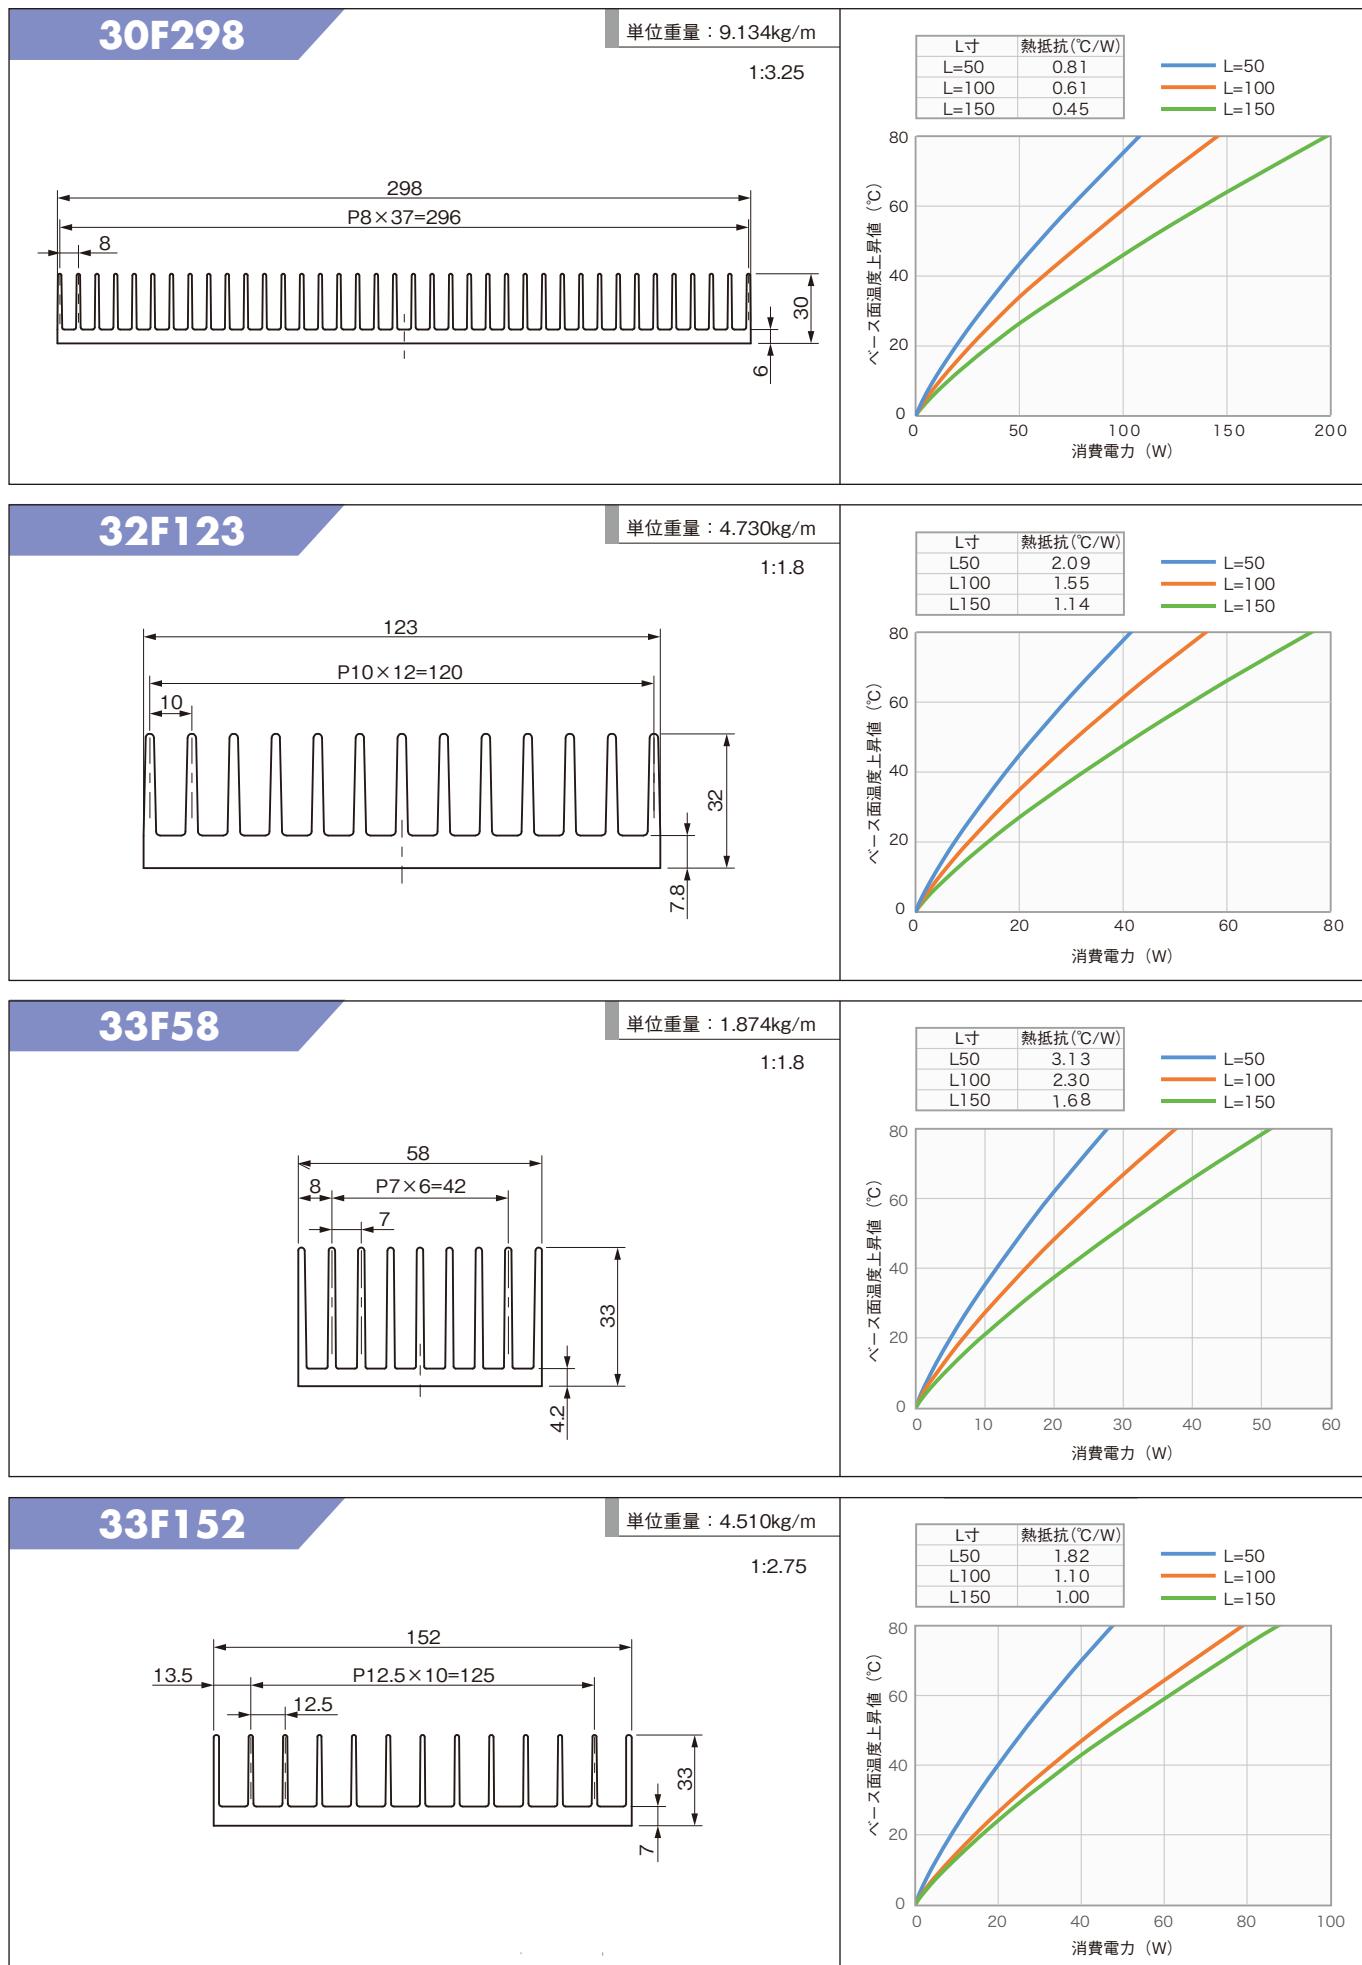

33F170


単位重量 : 3.070kg/m

1:2.75

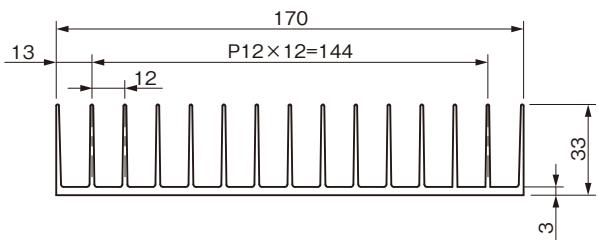

L寸	熱抵抗(°C/W)
L50	1.52
L100	0.92
L150	0.83


— L=50
— L=100
— L=150

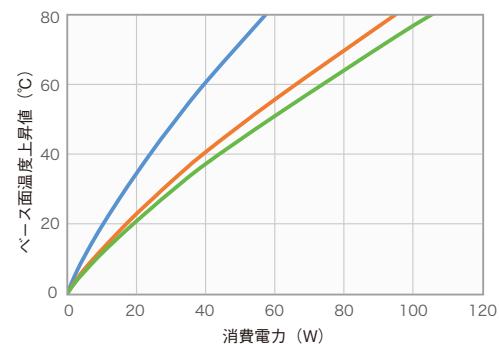

33F250


単位重量 : 8.510kg/m

1:2.75

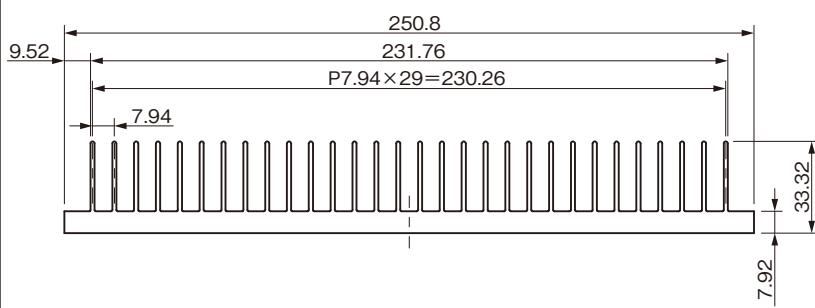

L寸	熱抵抗(°C/W)
L50	0.97
L100	0.72
L150	0.53


— L=50
— L=100
— L=150

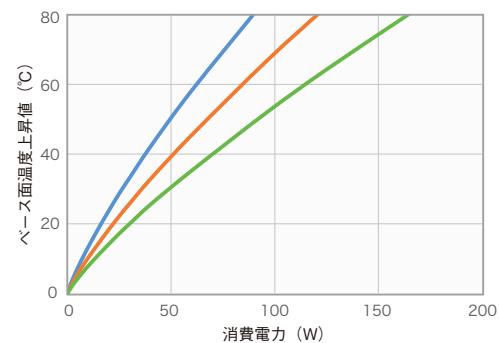

35F159


単位重量 : 3.820kg/m

1:2.25

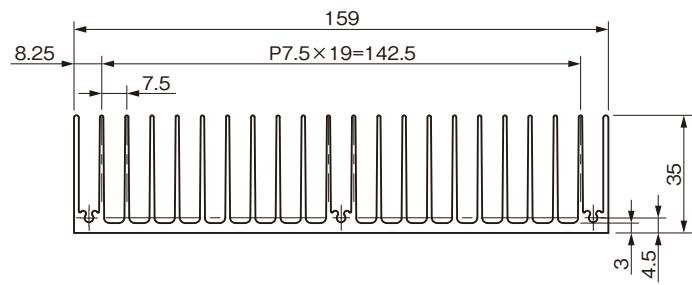

L寸	熱抵抗(°C/W)
L50	1.21
L100	0.90
L150	0.67


— L=50
— L=100
— L=150

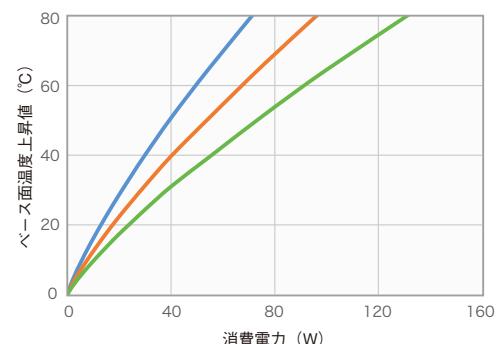

40F40

単位重量 : 1.977kg/m


1:1.8



ローレット付

L寸	熱抵抗(°C/W)
L50	4.98
L100	3.02
L150	2.72


— L=50
— L=100
— L=150

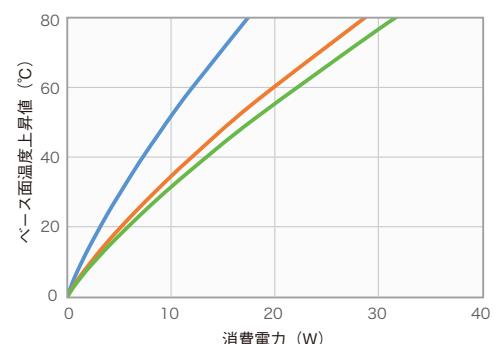

40F52

単位重量 : 2.505kg/m


1:1.8



ローレット付

L寸	熱抵抗(°C/W)
L50	4.09
L100	2.49
L150	2.23


— L=50
— L=100
— L=150

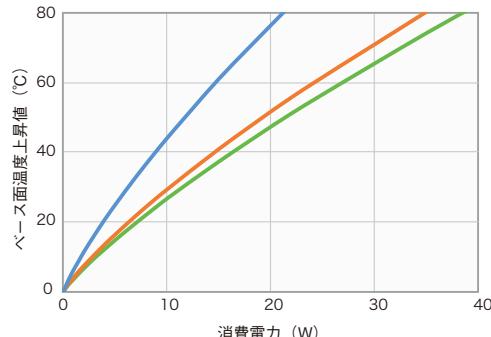

40F64

単位重量 : 2.813kg/m


1:1.8

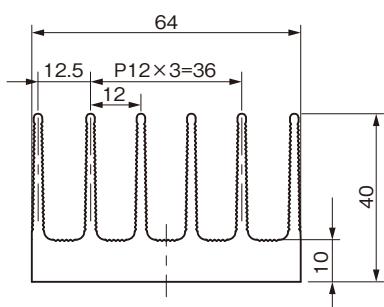

ローレット付

L寸	熱抵抗(°C/W)
L50	3.45
L100	2.09
L150	1.89


— L=50
— L=100
— L=150

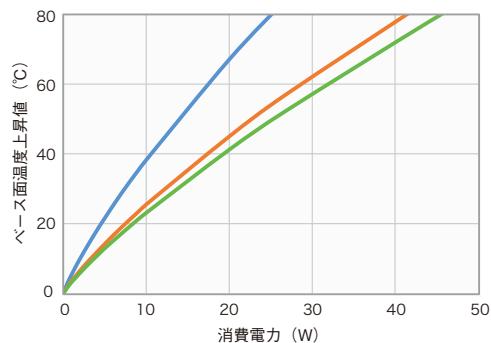

40F78


単位重量 : 3.972kg/m

1:1.8

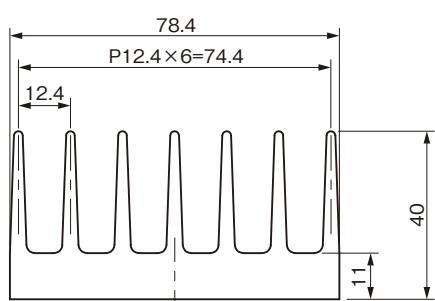

L寸	熱抵抗(°C/W)
L50	3.01
L100	1.83
L150	1.66


— L=50
— L=100
— L=150

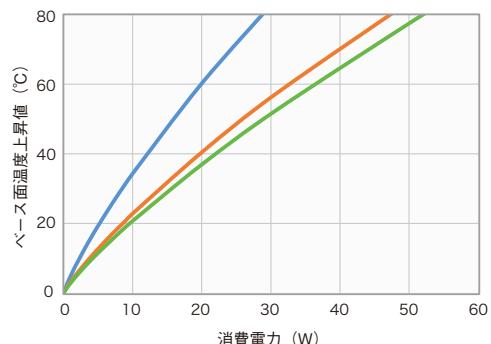

40F88

単位重量 : 3.810kg/m


1:2.25

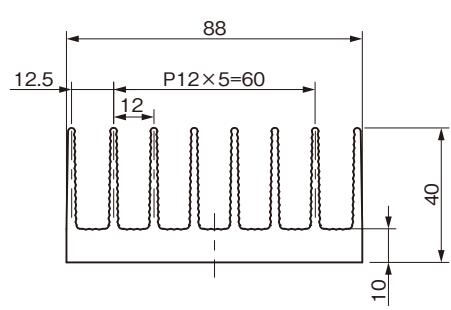

ローレット付

L寸	熱抵抗(°C/W)
L50	2.63
L100	1.61
L150	1.45


— L=50
— L=100
— L=150

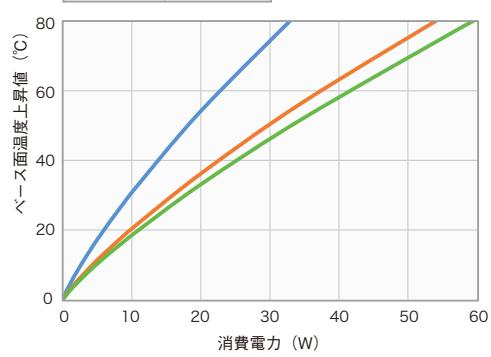

40F100

単位重量 : 4.680kg/m


1:2.25

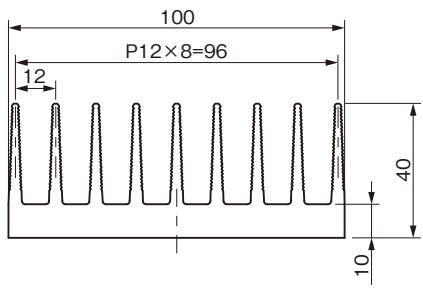

ローレット付

L寸	熱抵抗(°C/W)
L50	2.38
L100	1.45
L150	1.31


— L=50
— L=100
— L=150

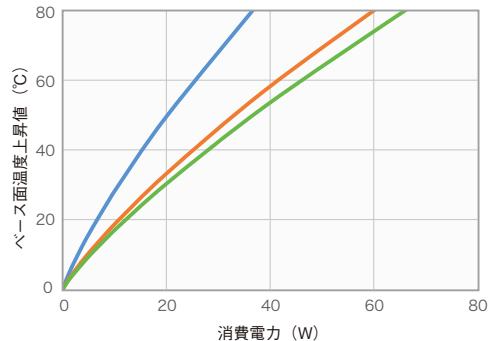

40F136

単位重量 : 5.835kg/m


1:2.25

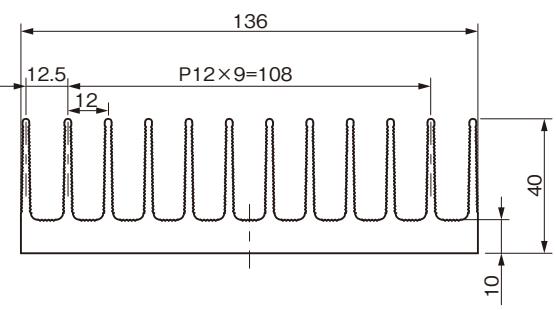

ローレット付

L寸	熱抵抗(°C/W)
L50	1.80
L100	1.10
L150	1.00


— L=50
— L=100
— L=150

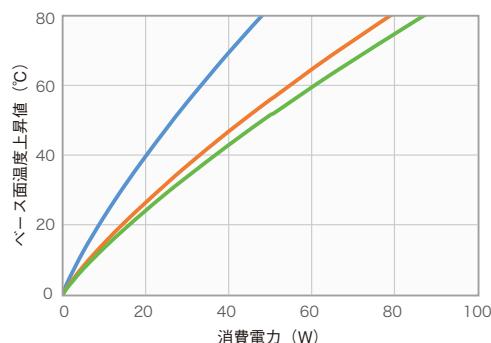

40F160

単位重量 : 7.706kg/m


1:2.25

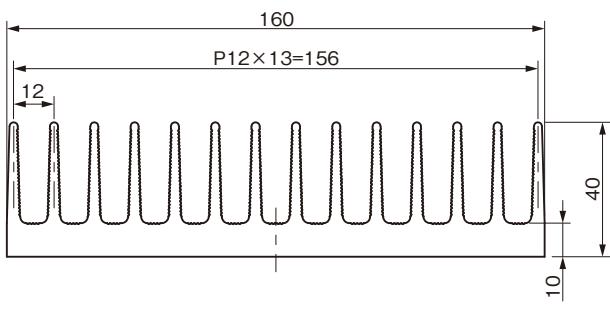

ローレット付

L寸	熱抵抗(°C/W)
L50	1.55
L100	0.95
L150	0.86


— L=50
— L=100
— L=150

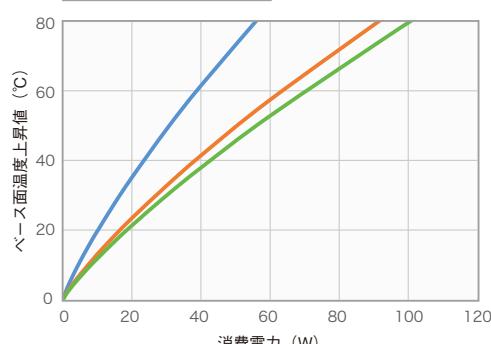

40F220

単位重量 : 10.500kg/m


1:3.5

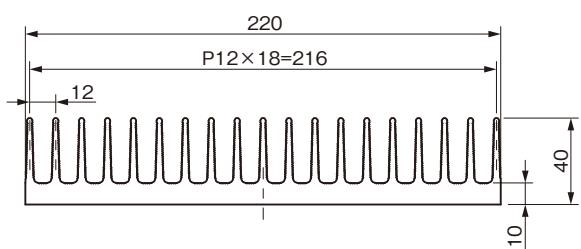

ローレット付

L寸	熱抵抗(°C/W)
L50	1.16
L100	0.71
L150	0.64


— L=50
— L=100
— L=150

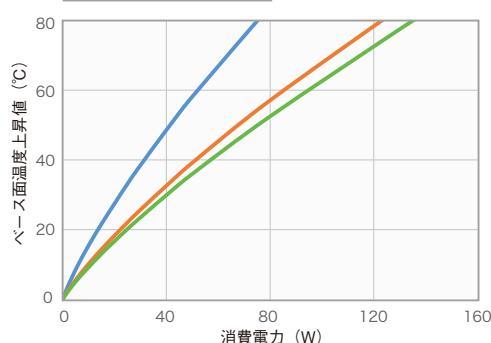


40F256

单位重量：10.079kg/m

1:3.5

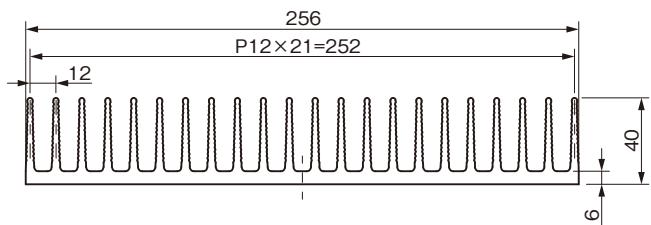


L寸	熱抵抗(°C/W)
L=50	0.94
L=100	0.58
L=150	0.53

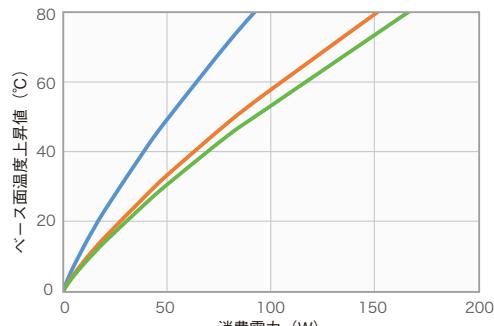


40F268

单位重量 : 12.592kg/m

135

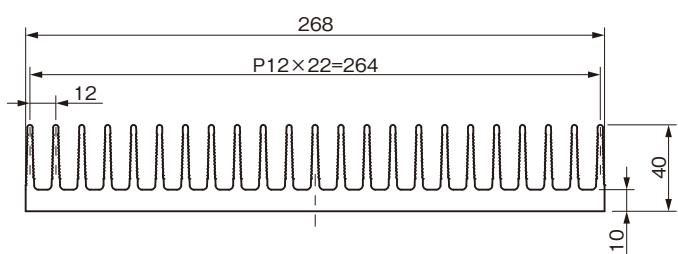


L寸	熱抵抗(°C/W)
L=50	0.96
L=100	0.59
L=150	0.53

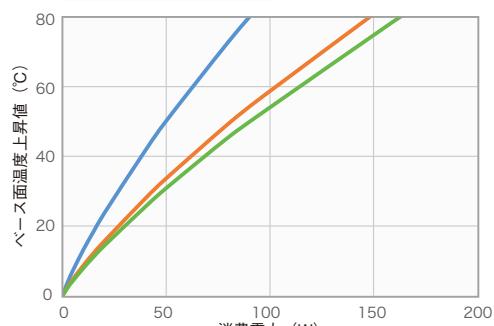


40F273

单位重量：10.500kg/m

1:3.5

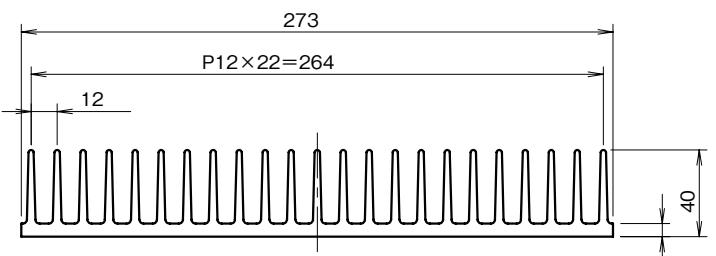


L寸	熱抵抗(°C/W)
L=50	0.89
L=100	0.54
L=150	0.42

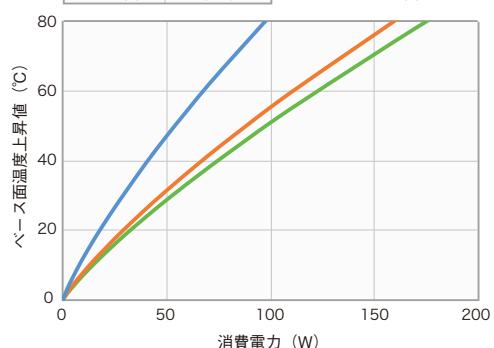


40F304

单位重量：11.959kg/m

135

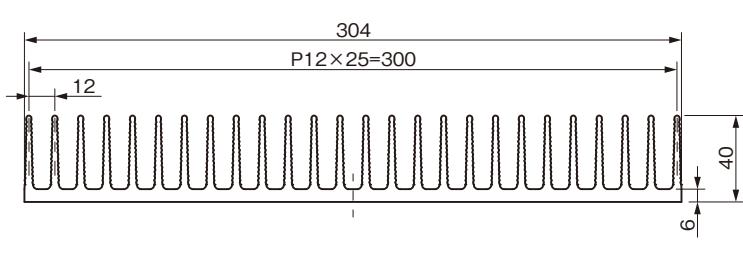


L寸	熱抵抗(°C/W)
L=50	0.80
L=100	0.49
L=150	0.45

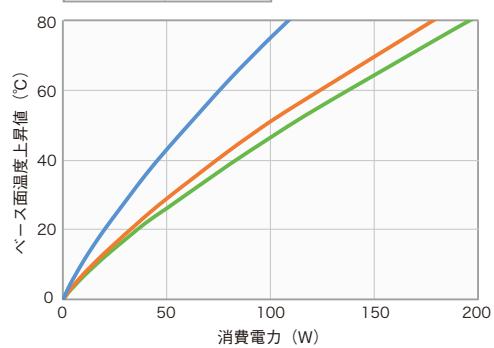

48F170


単位重量 : 5.752kg/m

1:3

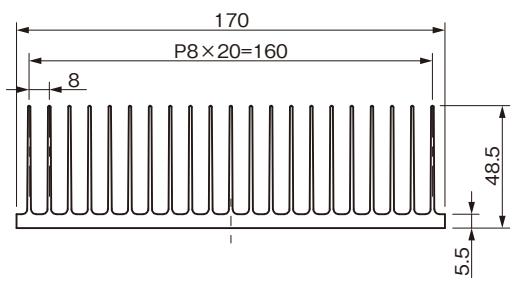

L寸	熱抵抗(°C/W)
L=50	0.97
L=100	0.73
L=150	0.54


— L=50
— L=100
— L=150

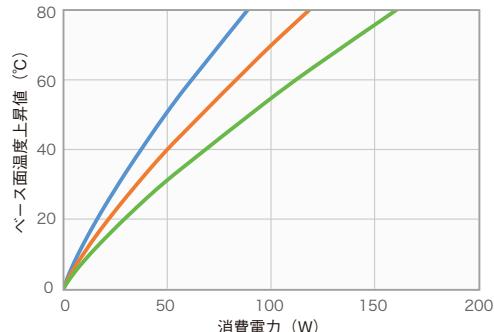

50F147

単位重量 : 7.003kg/m


1:3

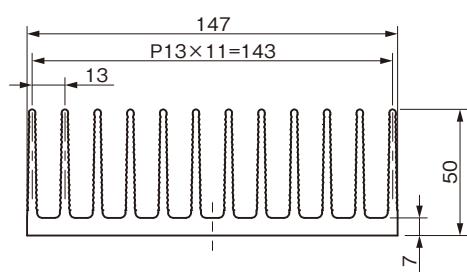

ローレット付

L寸	熱抵抗(°C/W)
L=50	1.38
L=100	0.86
L=150	0.78


— L=50
— L=100
— L=150

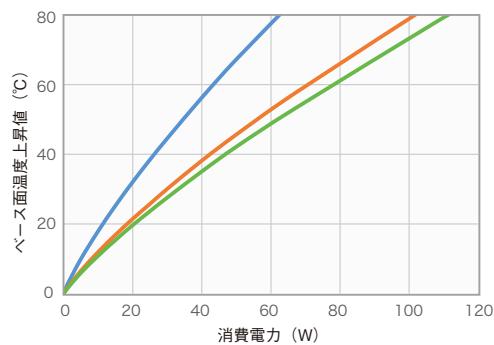

50F199

単位重量 : 9.445kg/m


1:3

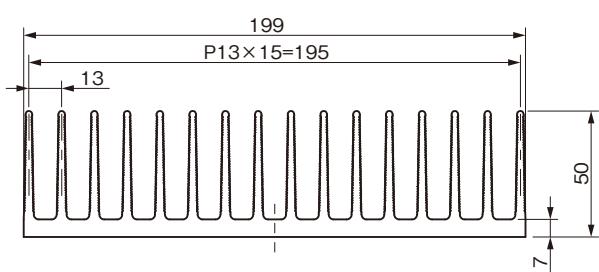

ローレット付

L寸	熱抵抗(°C/W)
L=50	1.04
L=100	0.65
L=150	0.59


— L=50
— L=100
— L=150

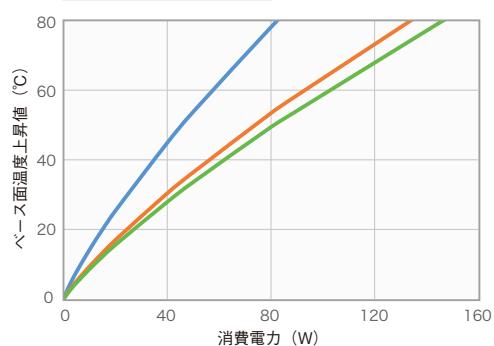

51F112


単位重量 : 3.964kg/m

1:2.25

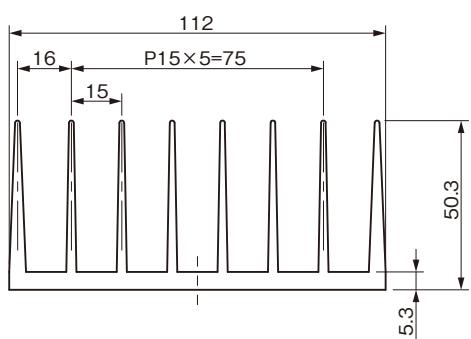

L寸	熱抵抗(°C/W)
L=50	1.88
L=100	1.16
L=150	0.85


— L=50
— L=100
— L=150

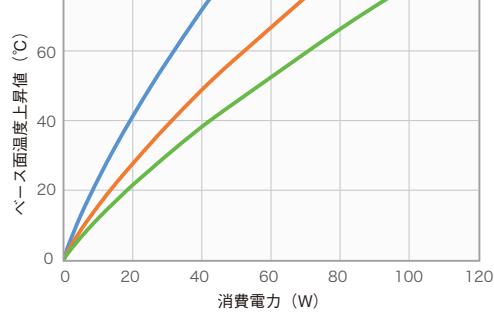


51F349

単位重量 : 17.280kg/m

1:3.75

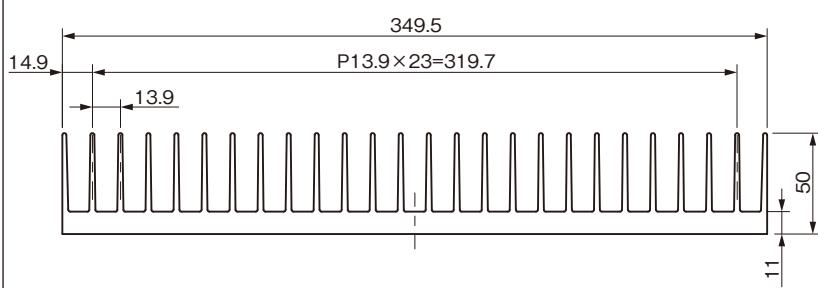


L寸	熱抵抗(°C/W)
L=50	0.67
L=100	0.42
L=150	0.38

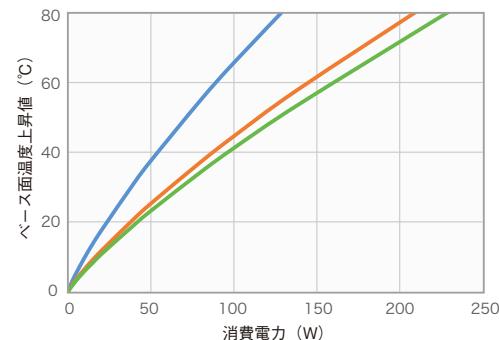


60F56

単位重量 : 3.983kg/m

1:2.25

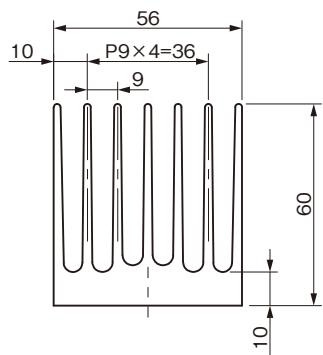


L寸	熱抵抗(°C/W)
L=50	2.32
L=100	1.73
L=150	1.29

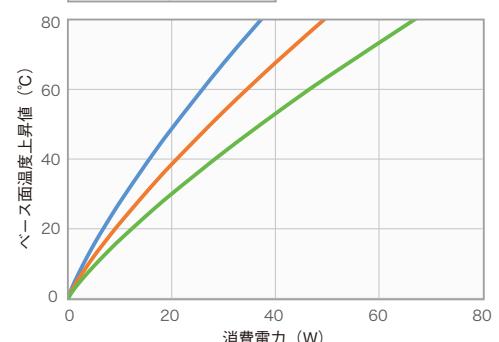


60F60

単位重量 : 4.849kg/m

1:2.25

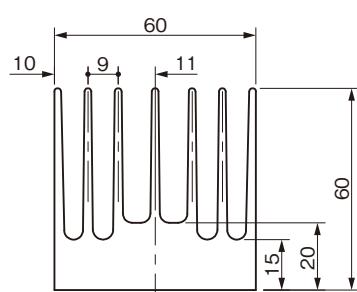


L寸	熱抵抗(°C/W)
L=50	2.39
L=100	1.81
L=150	1.34

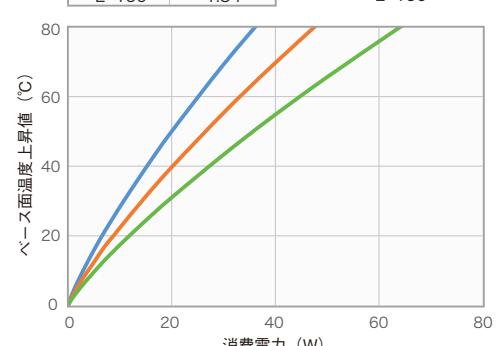


60F110

単位重量 : 8.126kg/m

1:3

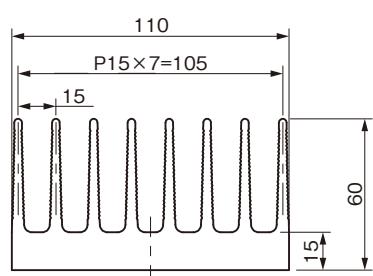

L寸	熱抵抗(°C/W)
L=50	1.78
L=100	1.11
L=150	1.01

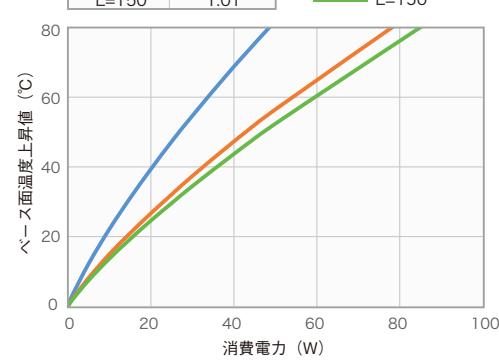


ローレット付

60F155


単位重量 : 11.361kg/m

1:3

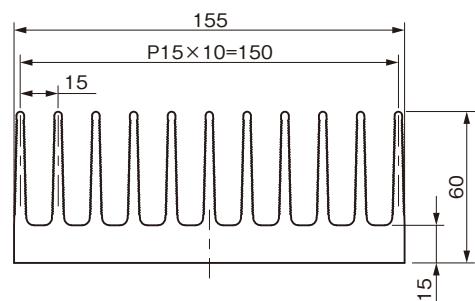

L寸	熱抵抗(°C/W)
L=50	1.33
L=100	0.83
L=150	0.76


— L=50
— L=100
— L=150

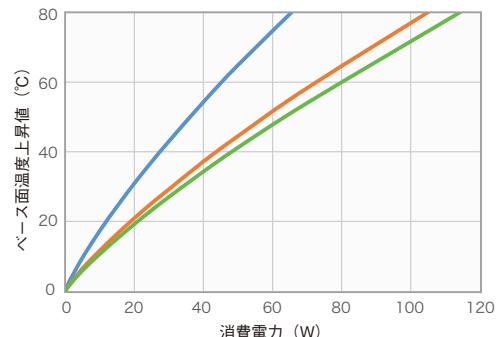

60F230


単位重量 : 16.654kg/m

1:3

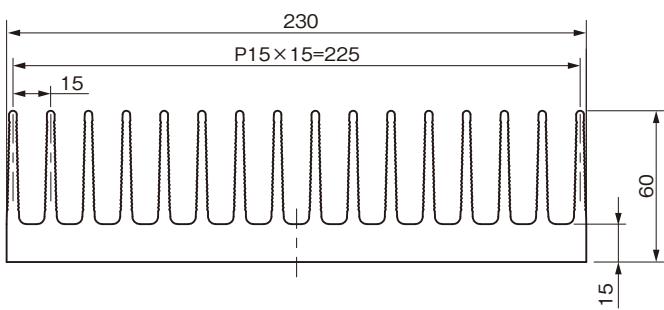

L寸	熱抵抗(°C/W)
L=50	0.93
L=100	0.58
L=150	0.53


— L=50
— L=100
— L=150

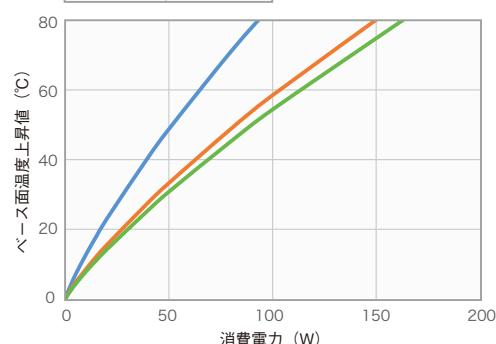

60F260


単位重量 : 15.012kg/m

1:3

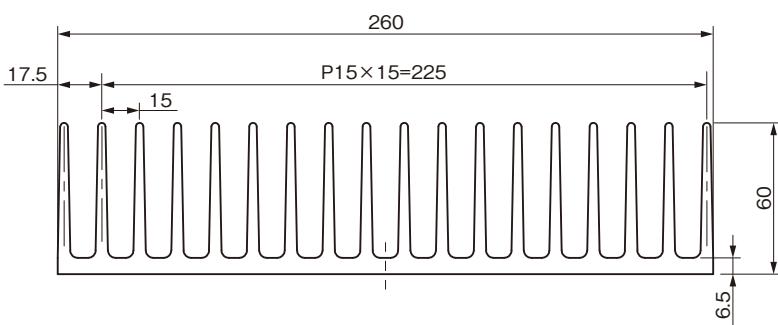

L寸	熱抵抗(°C/W)
L=50	0.76
L=100	0.48
L=150	0.43


— L=50
— L=100
— L=150

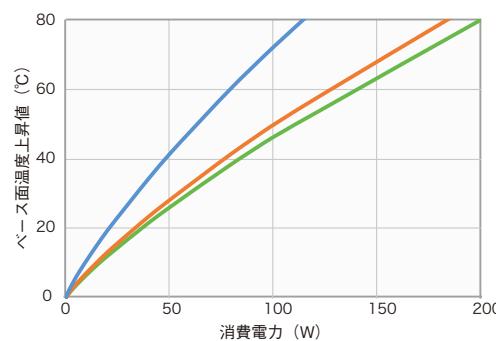

61F170


単位重量 : 12.490kg/m

1:3

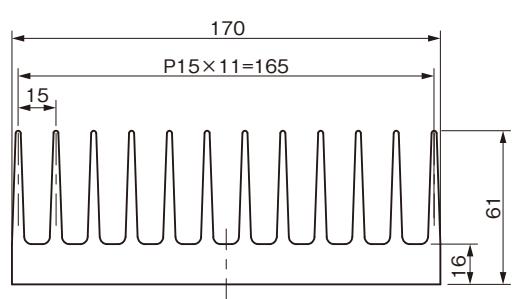

L寸	熱抵抗(°C/W)
L=50	1.23
L=100	0.77
L=150	0.70


— L=50
— L=100
— L=150

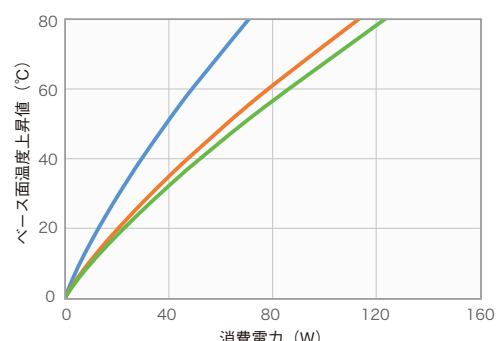

64F133


単位重量 : 6.834kg/m

1:3

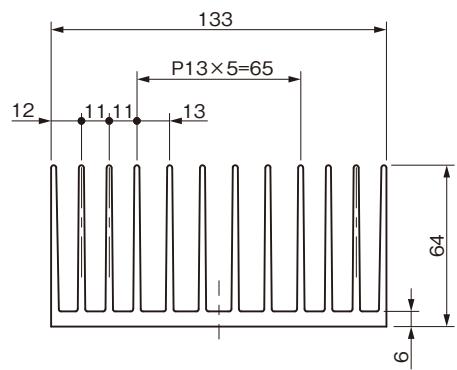

L寸	熱抵抗(°C/W)
L=50	1.17
L=100	0.73
L=150	0.66


— L=50
— L=100
— L=150

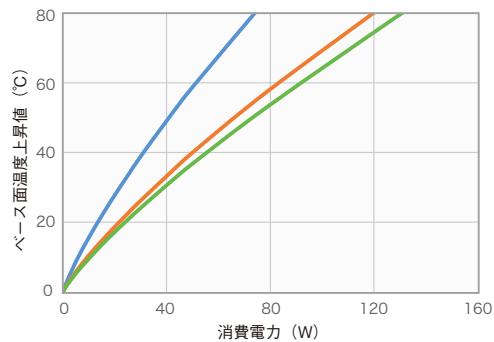

67F103


単位重量 : 6.922kg/m

1:3



L寸	熱抵抗(°C/W)
L=50	1.55
L=100	0.96
L=150	0.88


— L=50
— L=100
— L=150

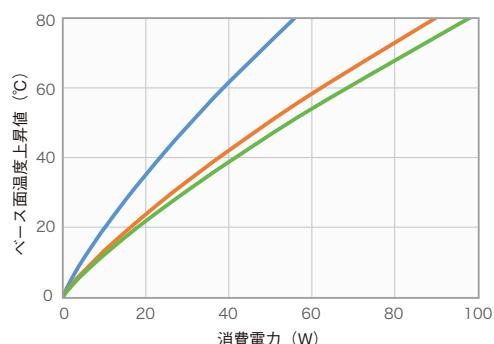

70F197


単位重量 : 12.400kg/m

1:3

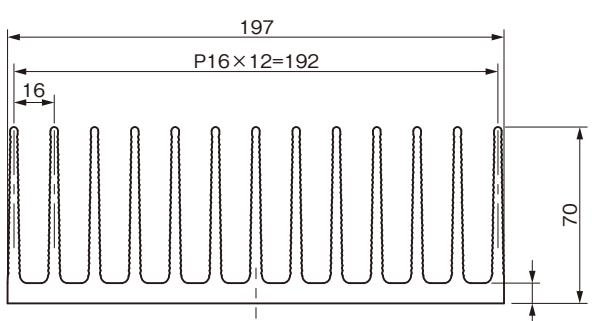

L寸	熱抵抗(°C/W)
L=50	0.90
L=100	0.57
L=150	0.52


— L=50
— L=100
— L=150

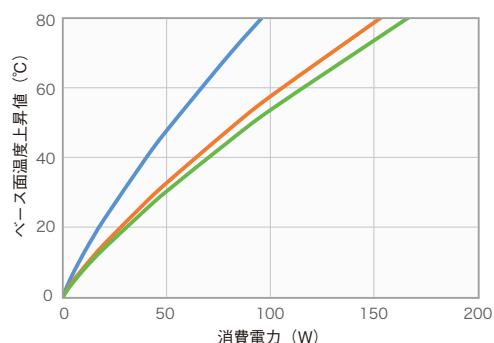

77F125

単位重量 : 8.913kg/m

1:3

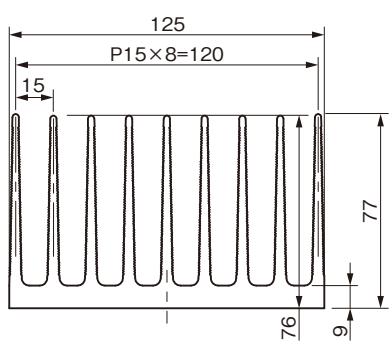

L寸	熱抵抗(°C/W)
L=50	1.22
L=100	0.77
L=150	0.70

— L=50
— L=100
— L=150

